Quantra® Printer – Instructions for Use

EN

For use with the Quantra® Hemostasis Analyzer

REF KT-0015

Quantra® Printer

IVD CE

℞ ONLY

Intended Use

When a printout of results is desired, the Quantra® Printer attaches to the Quantra by way of a USB port.

Instructions for use

When the accessory Quantra printer is attached, a printout of the selected test can be created.

NOTE: Only a HemoSonics supported printer is configured to print results from the Quantra.

1. Insert the printer's USB plug into the USB port behind the printer.
2. Press the print icon on the upper taskbar and a preview printout is displayed in Figure 1 with:
   a. Header containing patient and test information.
   b. The result and reference and reportable ranges for the cartridge being used.
   c. Choose "x" on the bottom left of the print preview to close the preview window.
   d. Click the print icon on the lower right of the print preview.
3. The bottom section of the print preview provides the printer's status:
   a. Ready – printer is functional. Press the print icon on the bottom right of the print preview window to print the report.
   b. Communication Error – Printer not connected or printer malfunction.
   c. High Temperature Error – temperature above operational specification – let cool.
   d. Unknown Error.
   e. Battery Charging – battery voltage too low for printing.
   f. Connecting – Quantra software is connecting with the printer.
   g. Printing – Quantra software is sending data to the printer.
   h. Out of Paper – printer out of paper. NOTE: The last two meters of the print roll is marked with fuchsia to indicate the end of the roll.
      i. Lift rear compartment to open print tape roll compartment.
      ii. Insert a new roll between the two tension holders with the paper exiting the roll coming up towards the back of the printer. Close lid.
      NOTE: The printer paper is thermal. Please store at temperatures no higher than the Quantra operating range.

© 2025 HemoSonics, LLC.

4. LED Indications
   - None – battery charging no error (or unplugged).
   - Blinking Red/Orange – Printer offline, exception, or fault.
   - Solid Green – Ready to print.

NOTE: A communication error may occur due to a low internal battery charge. If this happens, the printer should be connected to the Quantra Analyzer via the USB cable to allow charging of the internal battery overnight.

NOTE: Any Patient ID or User ID, which is longer than the allowed space on the printer tape, will be truncated.

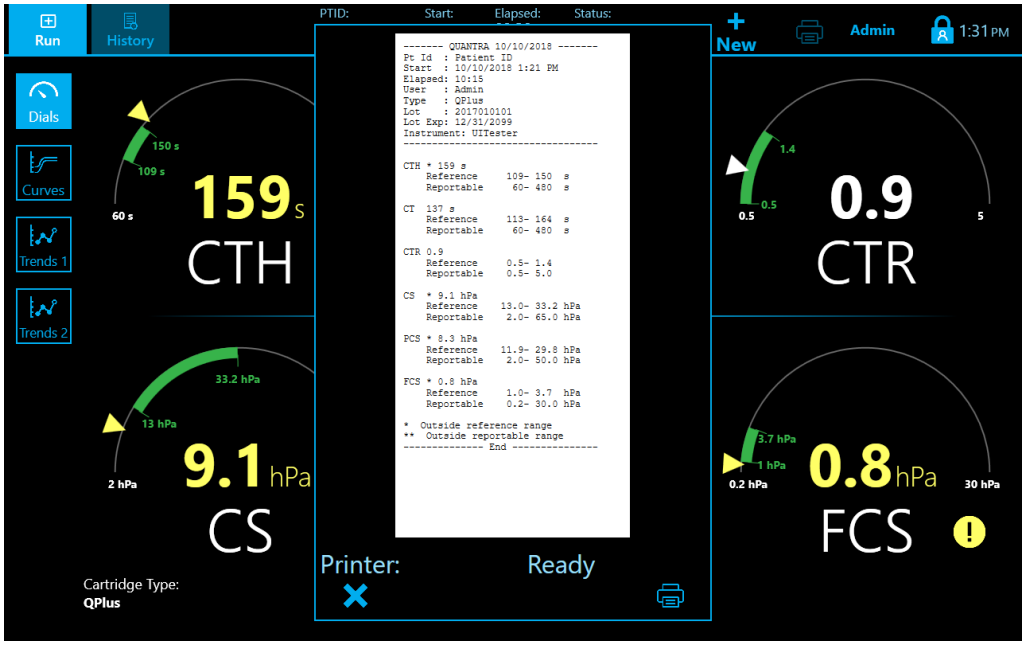

Figure 1 Print Preview Screen

Glossary of Symbols

Symbols used in this printer instructions are displayed on the Quantra Printer. (Table 1).

Symbol	Found on	Relevance
	Printer	Manufacturer name and address
	Printer	Indicates that the Printer must be disposed of following WEEE requirements.
	Printer	Indicates the printer is RoHS Compliant

© 2025 HemoSonics, LLC.

Revision History

Date of Revision	Revision Number	Description of Technical Changes
2018-01	00	Original Release
2018-05	01	Updated printer instructions to align with user manual
2018-06	02	Updated printer instruction for Software 1.4
2018-10	03	Updated printer instruction for Software 1.5
2020-02	04	Removed -238004- from part #. Updated document revision number for all translations to current English revision.
2022-10	05	Added note about communication error. Updated manufacturing address to Durham, North Carolina. Added authorized representative information.
2025-01	06	Updated EC REP Address. Added CH REP Information

EC REP QbD RepS BV Groenenborgerlaan 16
2610 Wilrijk, Belgium

CH REP Qarad Suisse S.A.
World Trade Center
Avenue Gratta-Paille 2
1018 Lausanne, Switzerland

HemoSonics, LLC
4020 Stirrup Creek Drive, Suite 105
Durham, NC 27703 USA www.hemosonics.com
Technical Support: (001) 800-280-5589

Quantra is a trademark of HemoSonics, LLC.

© 2025 HemoSonics, LLC.